




iBend
HYDRAULIC PRESS BRAKE



iShear
GUILLOTINE SHEAR

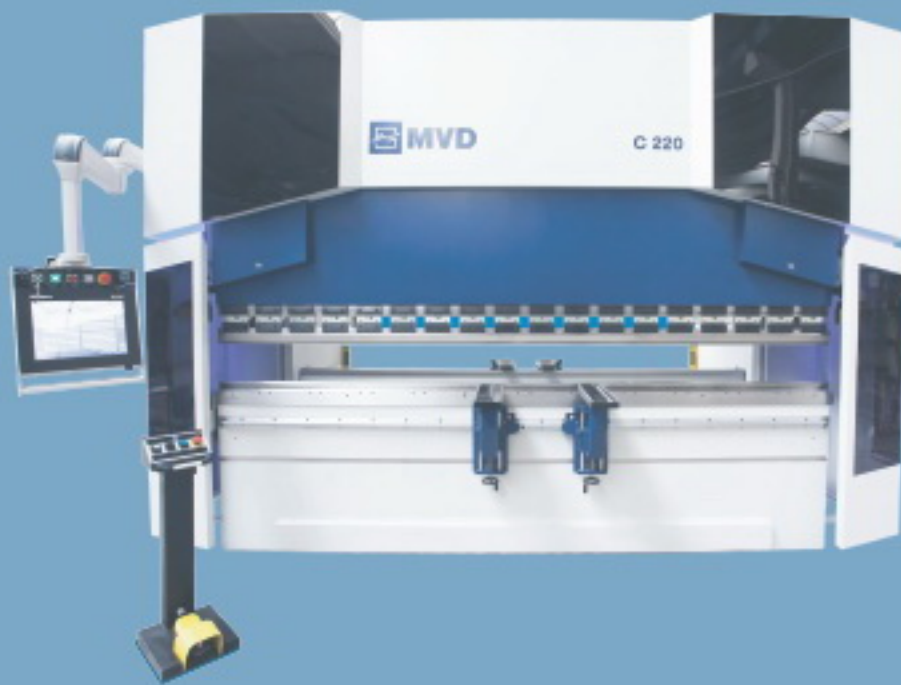

iBend A series

A series press brake can configure 3 axes (Y1,Y2,Z)
 A series press brake can configure maximum 5 axes (Y1,Y2,X1,X2,Z)
 A series CNC controller is standard numerically (SAS525 (MPS)
 A series CNC controller is optionally 2D graphical based controller (ybelco touch5, SAS540 (M40), ybelco touch 12 or (telco) DS 521
 MVD Backgauge (A6-Monitored)
 Domestic Optic Linear scales

iBend B series

B series press brake can configure 3 axes (Y1,Y2,Z)
 B series press brake can configure maximum 5 axes (Y1,Y2,X1,X2,Z1,Z2)
 B series CNC controller is standard graphical, standard (ybelco touch 6 2D graphical), SAS540 (M40) 2D graphical, telco DS 525
 B series CNC controller is optionally (ybelco touch 12 2D graphical or DS 581 2D or M45,
 iNIMEC Backgauge (S1-RO-Materials))

iBend C series

C series press brake can configure 4 axes (Y1,Y2,X1,Z)
 C series press brake can configure maximum 7 axes (Y1,Y2,X1,X2,Z1,Z2,Z3,AP,AMP)
 C series CNC controller is standard 2D (colored graphical),
 Standard (ybelco DNC 15), telco 641 or SAS500 (M40)
 C series CNC controller is optionally 3D CNC (ybelco Modysart, (ybelco) SAS500 (M40),
 Offline software for cycles and M30
 iNIMEC Backgauge (S1-RO)



Model	Bending	Bending	Between	Cylinder	Daylight	Throat	Backgauge	Bending Speed.	Main	Machine	
	Pressure	Length	Column	Stroke	Opening	Depth	Stroke	Down/Bend/Up	Motor	Weight.	
	Ton.	mm.	mm.	mm.	mm.	mm.	mm.	mm/s.	Kw.	kg.	
C100-3100	100	3100	2600	310	515	500	750	500	120/11/120	7.5	6800
C135-3100	135	3100	2600	310	515	500	750	500	120/11/120	11	8050
C175-3100	175	3100	2600	310	515	500	750	500	120/11/120	15	9150
C220-3100	220	3100	2600	310	515	500	750	500	110/11/120	18.5	11500
C320-3100	320	3100	2600	310	515	500	750	500	100/11/120	22	14900
C135-4100	135	4100	3200	310	515	500	750	500	120/11/120	11	10200
C175-4100	175	4100	3200	310	515	500	750	500	120/11/120	15	11600
C220-4100	220	4100	3200	310	515	500	750	500	110/11/120	18.5	13200
C320-4100	320	4100	3200	310	515	500	750	500	100/11/120	22	17000
C400-4100	400	4100	3200	310	550	500	750	500	90/10/90	30	22700
C320-6100	320	6100	5100	310	515	500	750	500	100/11/120	22	25600
C400-6100	400	6100	5100	310	550	500	750	500	90/10/110	30	32500
C600-6100	600	6100	5100	360	600	600	750	500	75/10/90	45	51500
C800-6100	800	6100	5100	410	650	600	750	500	70/9/90	55	60000



iShear B series

HEAVY DUTY HYDRAULIC SWING BEAM SHEARS

Special design MVD swing beam shears provide up to 2% cutting stroke per minute
 Manufacture in size 3 meters to 6 meters and capacities from to 20mm
 Backgauge range (stroke) 1000mm.

iShear C series

CNC VARIABLE RAKE ANGLE HYDRAULIC GUILLOTINE SHEARS

Cutting angle automatically adjusted according sheet thickness, this features provide high and precise cutting quality and reduced twisting or torsion effects of thin and narrow parts.
 When cutting thin and short parts, stroke reduced, performed number of stroke, speed increase.



MODEL	Cutting Thickness 450N/mm ²	Cutting Thickness 700N/mm ²	Cutting Length mm.	Between Column mm.	Cutting Angle mm.	Hold Down Cylinder unit.	Cutting Speed stroke/m.	Throat Depth mm.	Backgauge Stroke mm.	Motor Power Kw.	Machine Weight kg.
B06-2600	6	4	2600	2830	1.5	11	19/24	250	1000	10	5500
B06-3100	6	4	3100	3330	1.5	14	18/23	250	1000	10	6000
B10-3100	10	6	3100	3340	2	14	13/19	250	1000	22	9200
B13-3100	13	8	3100	3340	2.1	14	10/14	250	1000	22	12200
B06-4000	6	4	4000	4230	1.5	18	10/14	250	1000	10	11000
B13-4100	13	8	4000	4315	1.8	17	9/15	250	1000	22	19000
B06-6100	6	4	6150	6440	1	26	4/10	250	1000	22	23000
C06-3100	6	4	3100	3500	0.5-2	14	10/15	250	1000	10	6000
C10-3100	10	6	3100	3600	0.5-3	14	7/15	250	1000	22	10500
C13-3100	13	8	3100	2600	0.5-3	14	7/15	250	1000	22	12500
C16-3100	16	10	3100	3670	0.5-3	17	6/15	250	1000	30	16000
C20-3100	20	13	3100	3705	0.5-3	17	6/15	250	1000	37	20000
C06-4000	6	4	4000	4460	0.5-2	17	10/14	250	1000	10	12000
C13-4000	13	8	4000	4500	0.5-3	18	6/13	250	1000	22	18000
C16-4000	16	10	4000	4580	0.5-3	18	6/12	250	1000	30	22000
C13-6000	13	8	6150	6500	0.5-3	26	5/12	250	1000	22	35000
C16-6000	16	10	6150	6650	0.5-3	26	5/9	250	1000	30	40000



Another reliable product from

PROCUREMENT CENTRE (THAILAND) CO.,LTD.

Good machine , Good price , Good Service



บริษัท ไพรซิวิร์เมนต์ เซนเตอร์ (ประเทศไทย) จำกัด
PROCUREMENT CENTRE (THAILAND) CO., LTD.

PHO - 1800 888888 หรือ โทรไปรษณีย์ บริษัท ไพรซิวิร์เมนต์ เซนเตอร์ (ประเทศไทย) จำกัด 10320 ถนนวิภาวดีรังสิต แขวงสามยุค อ.ดินแดง กทม. 10400 | โทรสาร 02-5162666 | โทรไปรษณีย์ บริษัท ไพรซิวิร์เมนต์ เซนเตอร์ (ประเทศไทย) จำกัด 10320 ถนนวิภาวดีรังสิต แขวงสามยุค อ.ดินแดง กทม. 10400 | โทรไปรษณีย์ บริษัท ไพรซิวิร์เมนต์ เซนเตอร์ (ประเทศไทย) จำกัด 10320 ถนนวิภาวดีรังสิต แขวงสามยุค อ.ดินแดง กทม. 10400